

## A-ISOMETER® iso-PV with AGH-PV

Insulation monitoring device for unearthed AC, AC / DC and DC systems (IT systems) for photovoltaic plants up to AC 793 V / DC 1100 V

Preliminary data sheet



## A-ISOMETER® iso-PV with coupling device AGH-PV

Insulation monitoring device for unearthed AC, AC / DC and DC systems  
(IT systems) for photovoltaic plants up to AC 793 V / DC 1100 V



A-ISOMETER® iso-PV



Coupling device AGH-PV

### Device features

- Insulation monitoring for unearthed systems AC, AC / DC 0...793 V, DC 0...1100 V
- Two separately adjustable response values 0.2 kΩ...100 kΩ
- Various **AMP<sup>Plus</sup>** measurement methods selectable
- Automatic adaptation to the system leakage capacitance
- Info button to display device settings and the system leakage capacitance
- Self monitoring with automatic alarm
- Automatic self test, selectable
- Connection for external kΩ indication
- Test and reset button
- Connection external test and reset button
- Two separate alarm relays with two voltage-free changeover contacts
- N/O or N/C operation
- Backlit LC display
- RS-485 interface
- Presetting for PV systems via menu

### Product description

The A-ISOMETER® of the iso-PV series is designed to monitor the insulation resistance of unearthed main circuits (IT systems) AC, AC/DC 0...793 V resp. DC 0...1100 V. Solar systems containing inverters and isolating transformers are often designed as IT systems. iso-PV variants using the **AMP<sup>Plus</sup>** measurement method capable of adapting to slow voltage fluctuations meet the particular requirements of modern solar systems. Due to wide spatial distribution or EMC interference suppression methods often high leakage capacitances against earth occur in these systems. Considering this, the iso-PV automatically adapts to the system conditions in order to optimise the measuring time. In particular, the requirements for permissible voltage ranges along with a low level of insulation can be met here.

Use the A-ISOMETER® iso-PV in combination with the AGH-PV only. An external supply voltage allows deenergised systems to be monitored too.

### Application

- AC, DC or AC/DC main circuits
- Solar systems with directly connected inverters
- Solar systems with high system leakage capacitances of up to 2000 µF
- Solar systems with high but slow voltage fluctuations
- Systems including switched-mode power supplies
- Coupled IT systems

### Function

When the insulation resistance between the system conductors and earth falls below the set response value, the alarm relays switch and the alarm LEDs light up. Two separately adjustable alarm relays allow to distinguish between prewarning and alarm. The measured value is indicated on the LC display or an externally connectable measuring instrument. In this way any changes, for example when circuits are connected to the system, can be recognised easily. The fault message can be stored. The fault memory can be reset by pressing the reset button. By pressing the test button, the function of the device as well as the connections to system and earth can be tested. Pressing the Info button provides additional information, such as the existing system leakage capacitance or device settings.

The function of the device and the system and earth connections are continuously monitored. When a fault occurs, the system fault relay switches and the alarm LED "system fault" lights up. The parameterisation of the device can be carried out via the LC display or the function buttons integrated in the front plate.

### Additional functions

- History memory with real-time clock to store all alarm messages with date and time stamp
- Electrically isolated RS-485 interface (BMS protocol) for data exchange with other Bender devices
- Isometer disconnecting relays for the operation of several A-ISOMETER®s in coupled IT systems
- Current output 0(4)...20 mA (electrically isolated)


### Use in coupled IT systems

Isometer disconnecting relays and the control inputs F1/F2 integrated in the insulation monitoring device make them suitable for coupled IT systems too, and guarantees that only one A-ISOMETER® is active at any one time.

### Measurement method


**AMP<sup>Plus</sup>** The iso-PV uses the patented **AMP<sup>Plus</sup>** measurement method. This measuring method allows concise monitoring of modern power supply systems, also in case of extensive, directly connected DC components and high system leakage capacitances.

**Control elements iso-PV**

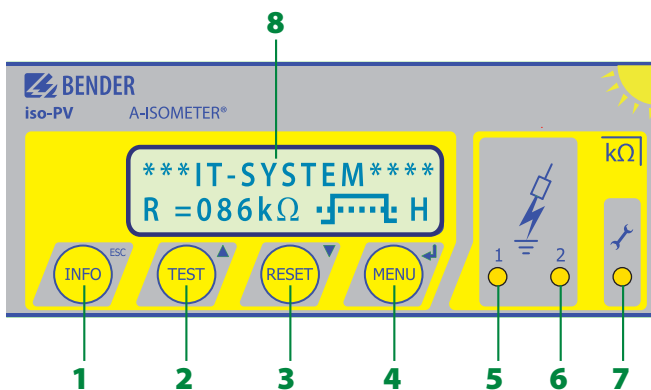

- 1- "INFO" button: to query standard information/ESC button: back (menu function), to confirm parameter change
- 2- "TEST" button: to call up the self test Arrow up button: parameter change, to move up in the menu
- 3- "RESET" button: to delete stored insulation fault alarms parameter change, to move down in the menu
- 4- "MENU" button: to call up the menu system. Enter button: to confirm parameter change
- 5- Alarm LED "1" lights: insulation fault, first warning level reached
- 6- Alarm LED "2" lights: insulation fault, second warning level reached.
- 7- LED device error lights: iso-PV faulty
- 8- Two-line display for standard and menu mode


**Wiring diagram**

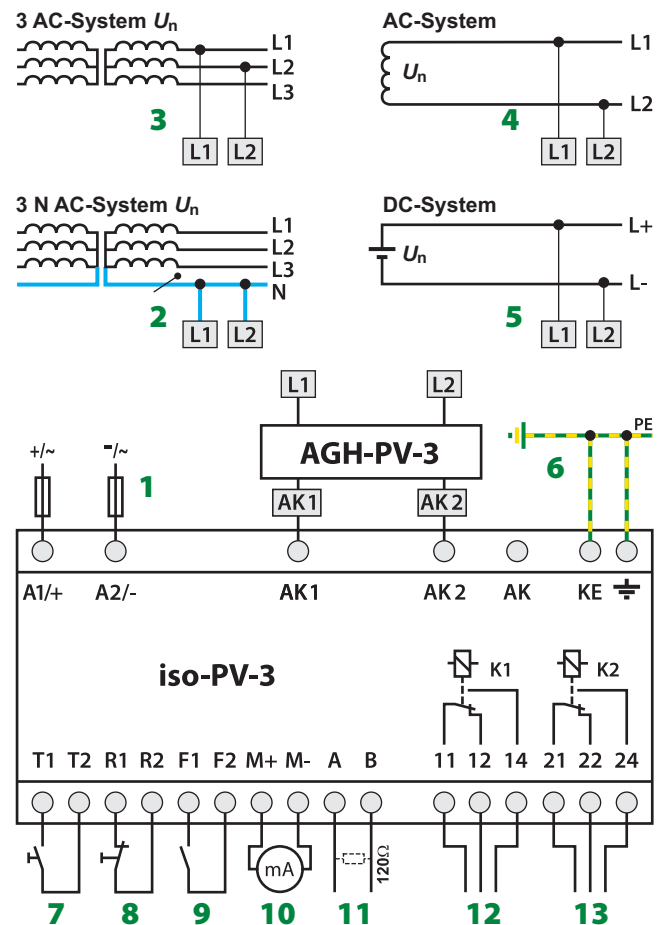


- 1- Supply voltage  $U_s$  (see nameplate) via 6 A
- 2, 3- Connection to the 3 AC system to be monitored: Connect the terminals L1, L2 to neutral conductor N or terminals L1, L2 to conductor L1, L2.
- 4- Connection to the AC system to be monitored: connect terminals L1, L2 to conductor L1, L2.
- 5- Connection to the DC system to be monitored: Connect terminal L1 to conductor L+, terminal L2 to conductor L-
- 6- Separate connection of E and KE to PE
- 7- External test button "T1"/"T2" (N/O contact)
- 8- External reset button "R1"/"R2" (N/C contact or wire jumper). When the terminals are open, the fault message will not be stored.
- 9- Standby mode using the function input "F1", "F2": when the contact is closed, the insulation resistance is not measured. Disconnection from the IT system
- 10- Current output, electrically isolated: 0...20 mA or 4...20 mA
- 11- Serial interface RS-485 (termination by means of a 120-Ω resistor)
- 12- Alarm relay "K1"; available changeover contacts.
- 13- Alarm relay "K2" (device error relay); available changeover contacts.

**Wiring diagram**



PV generator unearthed (IT system) with nominal voltage  $\leq$  DC 1100 V and A-ISOMETER® iso-PV with coupling device AGH-PV

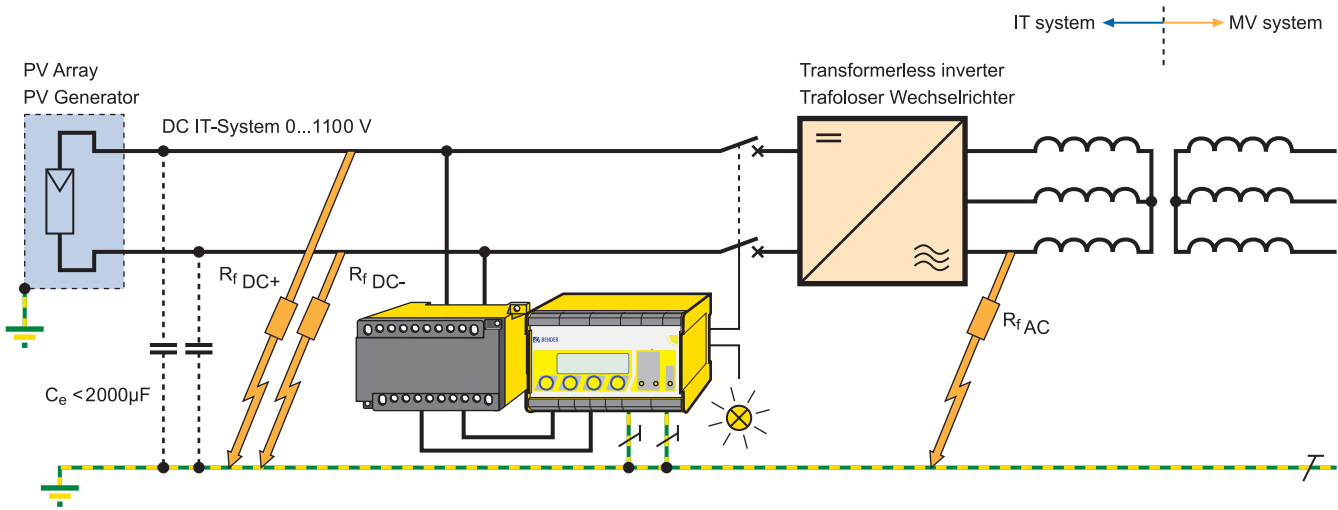

**Wiring diagram – iso-PV with coupling device AGH-PV**

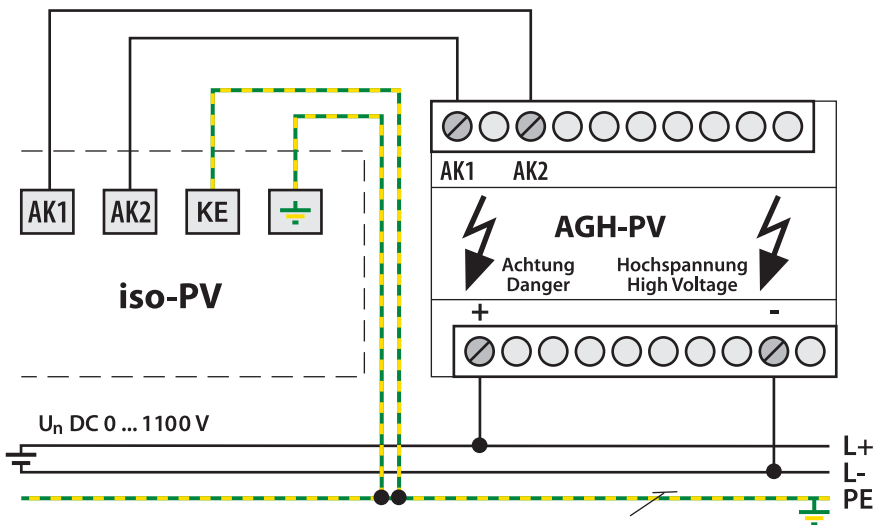

Several PV generators unearthed (IT system) with nominal voltage  $\leq$  DC 1100 V as a coupled system and A-ISOMETER® iso-PV with coupling device AGH-PV

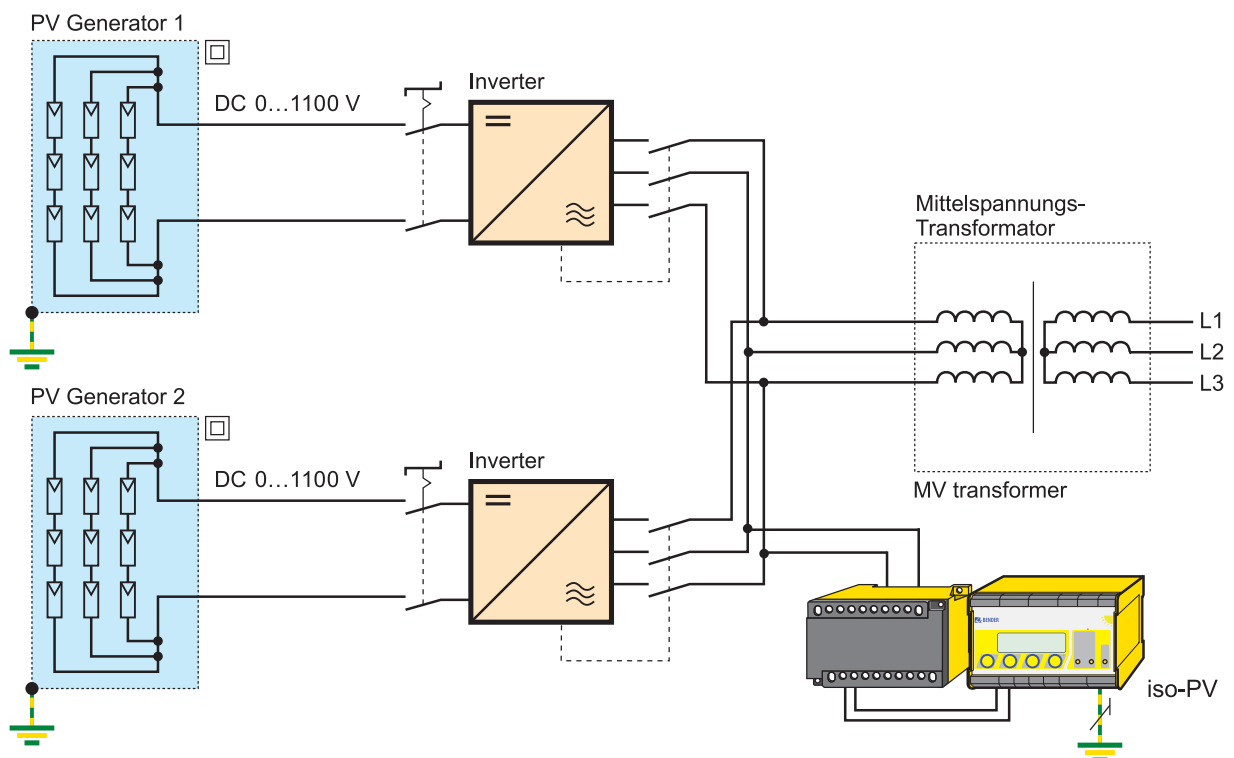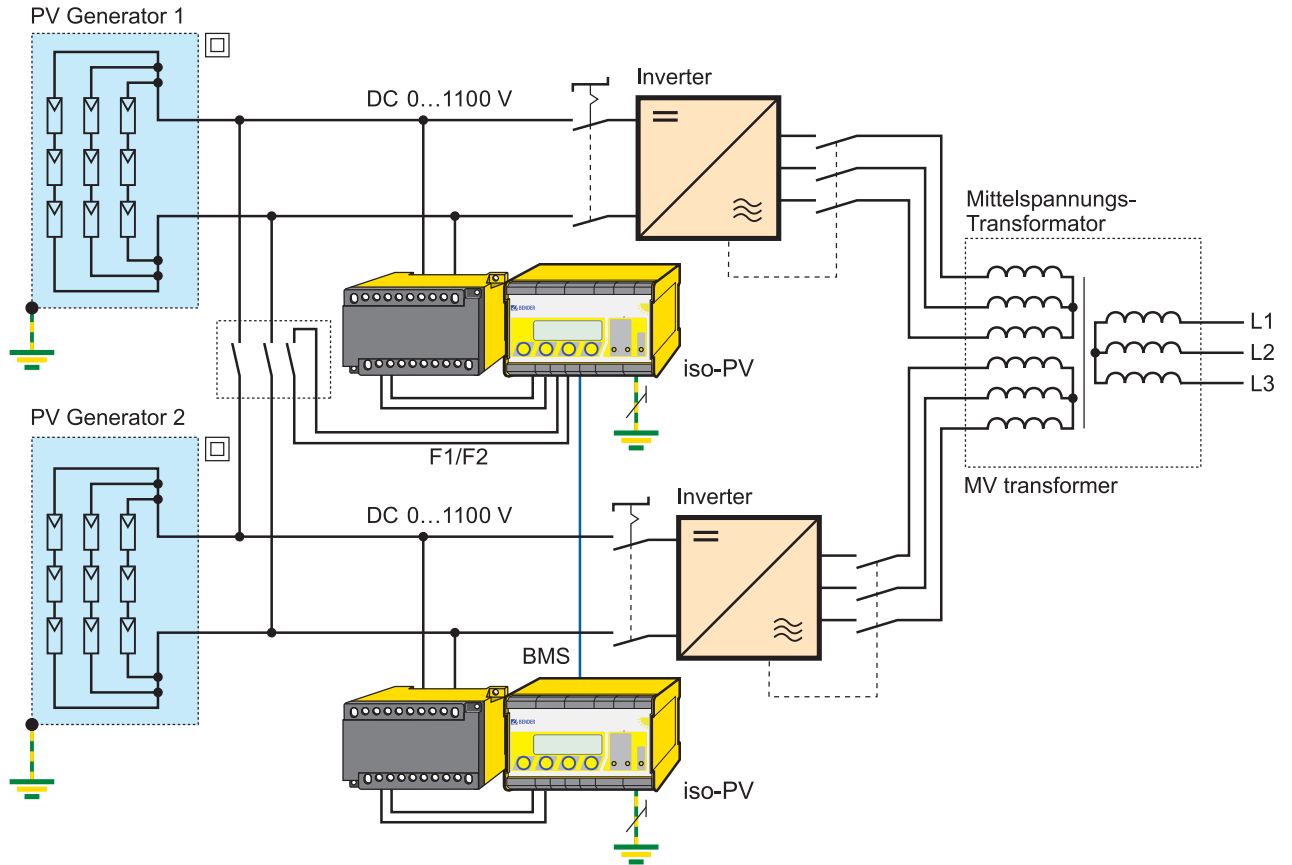

## Technical data A-ISOMETER® iso-PV

### Insulation coordination acc. to IEC 60664-1

Rated insulation voltage	AC 800 V
Rated impulse voltage/pollution degree	8 kV / 3

### Voltage ranges

Nominal system voltage $U_n$	via AGH-PV
------------------------------	------------

### iso-PV-335:

Supply voltage $U_S$ (also see nameplate)	AC 88...264 V**
Frequency range $U_S$	42...460 Hz
Supply voltage $U_S$ (also see nameplate)	DC 77...286 V**

### iso-PV-327:

Supply voltage $U_S$ (also see nameplate)	DC 19.2...72 V**
---	------------------

### iso-PV...:

Power consumption	≤ 8 VA
-------------------	--------

### Response values

Response value $R_{an1}$	0.2...100 kΩ
Factory setting $R_{an1}$ (Alarm1)	4 kΩ
Response value $R_{an2}$	0.2...100 kΩ
Factory setting $R_{an2}$ (Alarm2)	1 kΩ
Relative uncertainty (7 kΩ...100 kΩ) (acc. to IEC 61557-8:2007-01)	± 15 %
Relative uncertainty (0.2 kΩ...7 kΩ)	± 1 kΩ
Response time tan	see table THG1454 from page 39 onwards
Hysteresis	25 %, +1 kΩ

### Measuring circuit

Measuring voltage $U_m$ (peak value)	± 50 V
Measuring current $I_m$ (at $R_F = 0 \Omega$ )	≤ 1.5 mA
Internal DC resistance $R_i$	≥ 35 kΩ
Impedance $Z_i$ at 50 Hz	≥ 35 kΩ
Permissible extraneous DC voltage $U_{fg}$	≤ DC 1100 V
Permissible system leakage capacitance $C_e$	≤ 2000 μF (2000 μF)*

### Displays

Display, illuminated	two-line display
Characters (number / height)	2 x 16 / 4 mm
Display range measured value	0.2 kΩ...1 MΩ
Operating uncertainty	± 15 %, ± 1 kΩ

### Outputs/Inputs

Test/ reset button	internal/external
Cable length test/reset button, external	≤ 10 m
Current output (load)	0/4...20 mA (≤ 500 Ω)
Accuracy current output, related to the value indicated (1 kΩ...100 kΩ)	± 15 %, ± 1 kΩ

### Serial interface

Interface / protocol	RS-485 / BMS
Connection	terminals A/B
Cable length	≤ 1200 m
Shielded cable (shield to PE on one end)	2-core, ≥ 0.6 mm <sup>2</sup> , z. B. J-Y(St)Y 2x0.6
Terminating resistor	120 Ω (0.5 W)
Device address, BMS bus	1...30 (3)*

### Switching elements

Switching elements	2 changeover contacts: K1 (Alarm 1), K2 (Alarm 2, device error)
Operating mode K1, K2 (Alarm 1 / Alarm 2)	N/C operation n.c. / N/O operation n.o. (N/O operation n.o.)*

Contact data acc. to IEC 60947-5-1:

Utilisation category	AC 13	AC 14	DC-12	DC-12	DC-12
Rated operational voltage	230 V	230 V	24 V	110 V	220 V
Rated operational current	5 A	3 A	1 A	0.2 A	0.1 A
Minimum contact load	1 mA at AC/DC ≥ 10 V				

### Environment/EMC

EMC	not suitable for household and small companies IEC 61326-2-4: 2006-06 Ed. 1.0
Operating temperature	-25 °C...+70 °C

Classification of climatic conditions acc. to IEC 60721:

Stationary use (IEC 60721-3-3)	3K5 (with condensation and formation of ice)
Transport (IEC 60721-3-2)	2K3 (with condensation and formation of ice)
Long-term storage (IEC 60721-3-1)	1K4 (with condensation and formation of ice)

Classification of mechanical conditions acc. to IEC 60721:

Stationary use (IEC 60721-3-3)	
for screw fixing with accessories B990056	3M7
for DIN rail mounting	3M4
Transport (IEC 60721-3-2)	2M2
Long term storage (IEC 60721-3-1)	1M3

### Connection

Connection	screw-type terminals
Connection, rigid/flexible	0.2...4 mm <sup>2</sup> / 0.2...2.5 mm <sup>2</sup>
Connection, flexible with ferrule, without/with plastic sleeve	0.25...2.5 mm <sup>2</sup>
Tightening torque	0.5 Nm
Conductor sizes (AWG)	24...12
Cable length between iso-PV and AGH-PV	≤ 0.5 m

### Other

Operating mode	continuous operation
Mounting	display-oriented
Distance to adjacent devices	≥ 30 mm
Degree of protection, internal components (DIN EN 60529)	IP30
Degree of protection, terminals (DIN EN 60529)	IP20
Type of enclosure	X112, free from halogen
DIN rail mounting acc. to	IEC 60715
Screw fixing	2 x M4 with mounting clip
Flammability class	UL94 V-0
Software version	D351 V2.0
Weight	< 510 g

( ) \* = factory setting

Data labelled with \*\* are absolute values

**Technical data coupling device AGH-PV**

**Voltage ranges**

Nominal system voltage $U_n$	AC, 3(N)AC 0...793 V, DC 0...1100 V
Nominal frequency $f_n$	DC, 10...460 Hz
Max. AC voltage $U_{\sim}$ in the frequency range $f_n = 0.1...10$ Hz:	$U_{\sim} \text{max} = 110 \text{ V/Hz} * f_n$

**Environment/EMC**

EMC	IEC 61326-2-4: 2006-06 Ed. 1.0
Operating temperature	-25 °C...+70 °C
Classification of climatic conditions acc. to IEC 60721:	
Stationary use (IEC 60721-3-3)	3K5 (with condensation and formation of ice)
Transport (IEC 60721-3-2)	2K3 (with condensation and formation of ice)
Long-term storage (IEC 60721-3-1)	1K4 (with condensation and formation of ice)
Classification of mechanical conditions acc. to IEC 60721:	
Stationary use (IEC 60721-3-3)	3M7
Transport (IEC 60721-3-2)	2M2
Long-time storage (IEC 60721-3-1)	1M3

**Connection**

Connection	screw-type terminals
Connection, rigid/flexible	0.2...4 mm <sup>2</sup> / 0.2...2.5 mm <sup>2</sup>
Connection, flexible with ferrule, without/with plastic sleeve	0.25...2.5 mm <sup>2</sup>
Tightening torque	0.5 Nm
Conductor sizes (AWG)	24...12
Cable length between iso-PV and AGH-PV	≤ 0.5 m

**Other**

Operating mode	continuous operation
Mounting	cooling slots must be ventilated vertically!
Distance to adjacent devices	≥ 30 mm
Degree of protection, internal components (DIN EN 60529)	IP30
Degree of protection, terminals (DIN EN 60529)	IP20
Type of enclosure	X112, free from halogen
DIN rail mounting acc. to	IEC 60715
Screw mounting	2 x M4
Flammability class	UL94 V-0
Weight	< 230 g

**Ordering information A-ISOMETER® iso-PV**

Type	Nominal system voltage $U_n$	Supply voltage $U_s$	Art. No.
iso-PV-327 with AGH-PV	3(N)AC 0...793 V / DC 0...1100 V	DC 19.2...72 V	B 9106 5132W
iso-PV-335 with AGH-PV	3(N)AC 0...793 V / DC 0...1100 V	AC 88...264 / DC 77...286 V	B 9106 5133W


**Accessories**

**External kΩ measuring instrument 20 mA**

Type	Art. No.
9620-1421	B 986 841


**Dimension diagram XM112 – A-ISOMETER® iso-PV**

Dimensions in mm

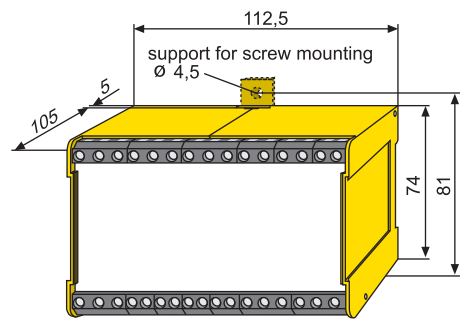

**Dimension diagram X200 – coupling device AGH-PV**

Dimensions in mm

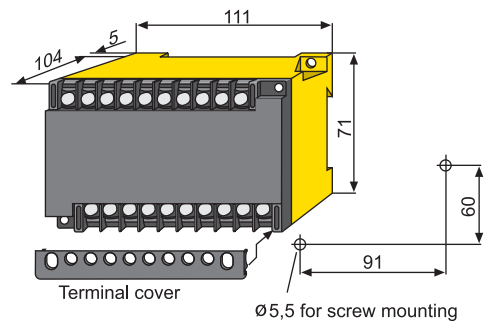



**Dipl.-Ing. W. Bender GmbH & Co. KG**  
Postfach 1161 • 35301 Grünberg • Germany  
Londorfer Straße 65 • 35305 Grünberg • Germany  
Tel.: +49 6401 807-0 • Fax: +49 6401 807-259  
E-Mail: [info@bender-de.com](mailto:info@bender-de.com) • [www.bender-de.com](http://www.bender-de.com)

**BENDER Group**